

ANPING DB METAL FENCING CO., LTD.


— Your Security Fence Experts

Anping DB Metal Fencing Co., Ltd.

is a professional Security Fence supplier in China. We are professionally engaged in the production and export of all kinds of temporary & Permanent perimeter and construction site security fencing.

Our company has owned over 100 sets of all kinds of welding machines and more than 200 staff members ensure high production efficiency and low production loss.

More than 20 research and development department workers has been developing more products suitable for customers' requirements and market trends.

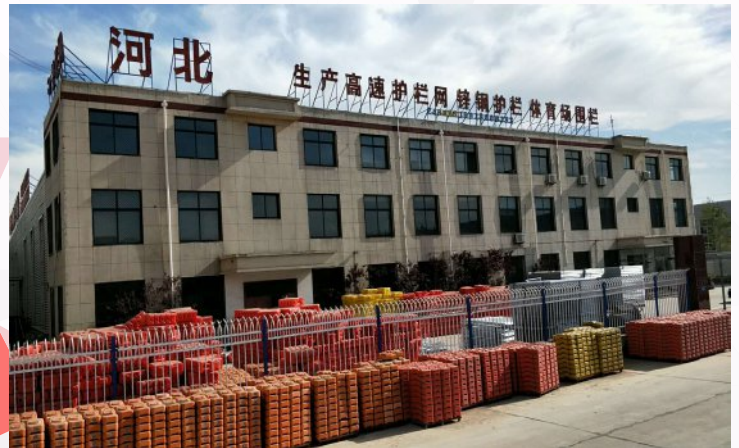

- Founded in 1998.
- Strict QC system in the production line.
- Standardized production under ISO 9001 International standard.
- R&D department researches more products for market and customers.
- Rigorous and innovative spirits guide us become the leading enterprise.
- Comply with Australia and international standards.



Contents

ANPING DB METAL FENCING CO., LTD.

01	Company Profile	P ₀₁
02	Brief Introduction	P ₀₁
03	What is 358 High Security Fence?	P ₀₃
04	What Can 358 High Security Fence Do?	P ₀₄
05	Technical Parameters	P ₀₅
06	Production Line	P ₁₀
07	Test Standard	P ₁₀
08	Package & Delivery	P ₁₀

WHAT IS 358 HIGH SECURITY FENCE?

The 358 high security fence is designed to provide the superb level of security, which is almost impossible to climb, cut and destroy. Whilst retaining a high level of visibility and high grade appearance, this system combines high security and aesthetic design.



Features

- Thick diameter for superb tensile strength and impact resistance.
- Extremely small mesh opening for anti-cutting, anti-climbing and anti-breaking.
- Hot dipped galvanized or powder coating for corrosion and rust resistance.
- Optional razor wires and wall spikes for security enhancing.
- 358/356/3510 Types for Choice.

358 Mesh Fence

8 gauge wire diameter
3" x 0.5" mesh opening

356 Mesh Fence

6 gauge wire diameter
3" x 0.5" mesh opening

3510 Mesh Fence


10 gauge wire diameter
3" x 0.5" mesh opening

WHAT CAN 358 HIGH SECURITY FENCE DO?



Features

- Prison.
- Military base.
- Airport.
- Railway.
- Shipping port.
- Power plant.
- Hospital.
- School.
- Community.
- Park.
- Bridge.
- Roadside.
- Farm.
- Borderline.

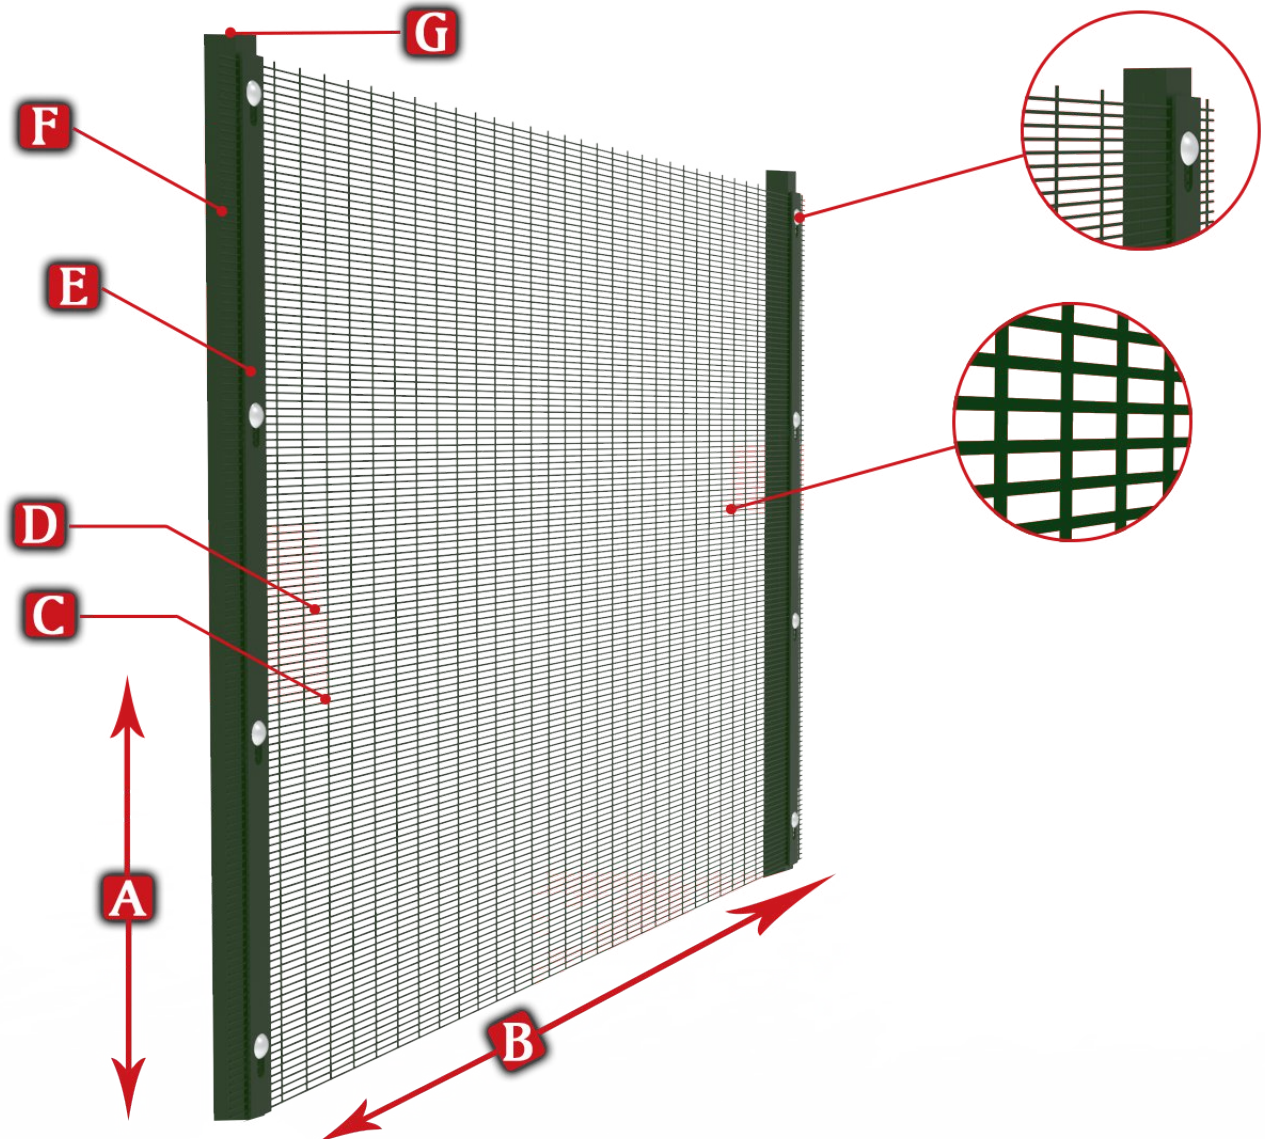

- A** Height: **955 mm** / 1206 mm / 1400 mm / 1600 mm / 1803 mm / 2006 mm / 2200 mm / 2400 mm / 2705 mm / 3009 mm / 3200 mm
- B** Width: 1500 mm / 2000 mm / 2500 mm / **2667 mm**
- C** Wire Diameter: 3.25 mm (10 Gauge), **4.0 mm (8 Gauge)**, 4.88 mm (6 Gauge)
- D** Mesh Size: 76.2 mm × 12.7 mm (3" × 0.5")
- E** Post: Square/Rectangular/**Round** Post (60 mm × 60 mm, 60 mm × 80 mm, 80 mm × 80 mm, OD 76.1 mm)
- F** Clamp: Spider Clip / Flat Bar / **OMEGA Clamp**
- G** Post Cap: Metal Cap / Anti-UV Plastic Cap
- S** Surface: Hot dipped galvanized / electric galvanized + polyester powder coated (RAL)

Specifications – 2D 358 High Security Fence

Item	Fence Height (m)	Panel Size (H × W)	Fence Post (H × Size × T)	Clamp Bar(mm) (H × W × T)	Interior or Corner Clamp No. (pcs)
2DS-1	2.0	2007 × 2515	2700 × 60 × 60 × 2.5	2007 × 60 × 5.00	7 or 14
2DS-2	2.4	2400 × 2515	3100 × 60 × 60 × 2.5	2400 × 60 × 5.00	9 or 18
2DS-3	3.0	2997 × 2515	3800 × 80 × 80 × 2.5	2997 × 80 × 6.00	11 or 22
2DS-4	3.3	3302 × 2515	4200 × 80 × 80 × 2.5	3302 × 80 × 6.00	12 or 24
2DS-5	3.6	3607 × 2515	4500 × 100 × 100 × 3.0	3607 × 100 × 7.00	13 or 26
2DS-6	4.2	4204 × 2515	5200 × 100 × 100 × 4.0	4204 × 100 × 8.00	15 or 30
2DS-7	4.5	4496 × 2515	5500 × 100 × 100 × 5.0	4496 × 100 × 8.00	16 or 32
2DS-8	5.2	5207 × 2515	6200 × 120 × 120 × 5.0	5207 × 100 × 8.00	18 or 36

Specifications – 3D 358 High Security Fence

Item	Panels				Posts			
	Fence Height	Panel Size (H × W)	No. of Beams	O/A Length	Material and Fixing Clamps			
	m	mm	—	mm	Interior		Interior	
					Material (mm)	Clamps No.	Material mm	Clamps No.
3DS-1	2.0	2000 × 2515	2	2700	80 × 60 × 2.0, RHS	6	80 × 80 × 2.5 SHS	12
3DS-2	2.4	2400 × 2515	3	3100	80 × 60 × 2.0, RHS	7	80 × 80 × 2.5 SHS	14
3DS-3	3.0	3000 × 2515	3	3800	80 × 80 × 2.5, SHS	10	80 × 80 × 2.5 SHS	20

PANEL TYPES



2D 358 High Security Fence


2D 358 high security fence is a special 358 high security fence. The 2D 358 high security fence panels have double horizontal wires at 152.4 mm centre. This structure make it more strength than the normal 358 high security fence.



3D 358 High Security Fence


3D 358 high security fence is very similar to the 358 high security fence. It also has anti-climb and anti-cut structures. But 3D 358 high security fence has special "V" shaped appearance. It combine the aesthetics and security.

CLAMP TYPES

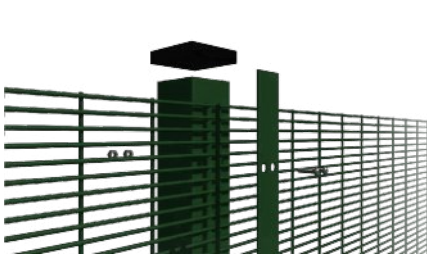

Flat Bar

2D/3D Fence Panels
Square/Rectangular Post

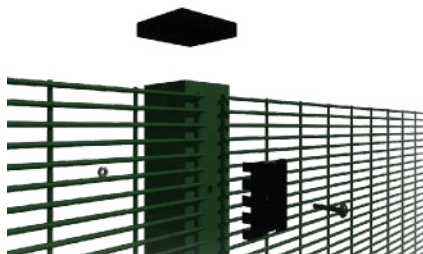

Spider Clip


2D/3D Fence Panels
Square/Rectangular Post




OMEGAR Clamp

2D/3D Fence Panels
Round Post

INSTALLATION TYPES

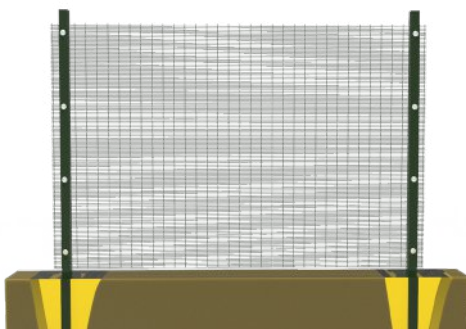


● Buried Installation (*for soil*)

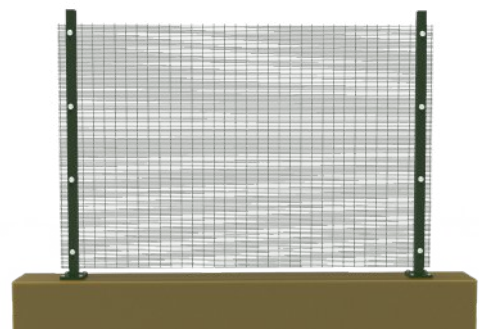

● Flange Base Installation (*for concrete*)

OPTIONAL COLORS

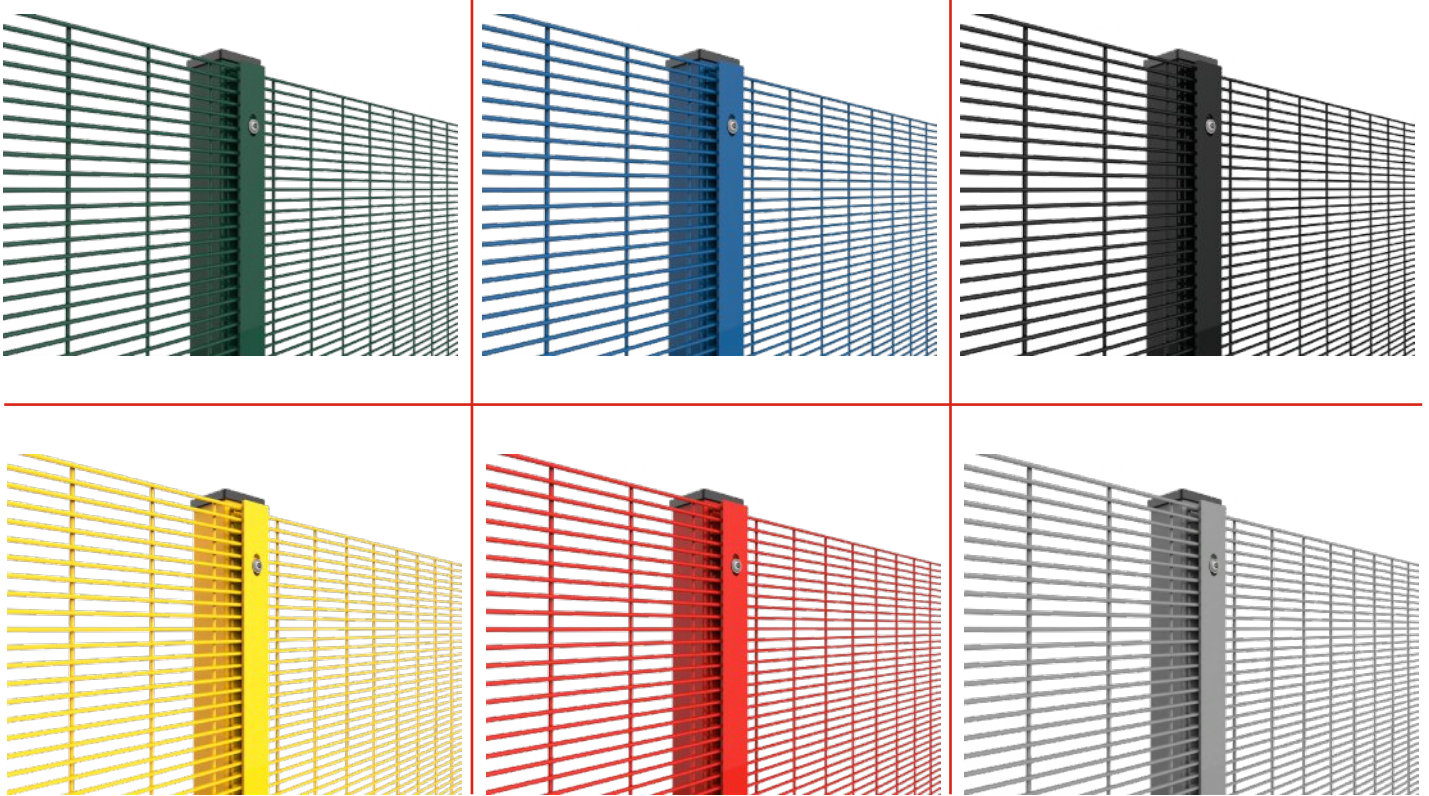

More Custom Colors

RAL-1000	RAL-1001	RAL-1002	RAL-1003	RAL-1004	RAL-1005	RAL-1006	RAL-1007	RAL-1012	RAL-1013	RAL-1015	RAL-1024
RAL-1027	RAL-1028	RAL-1032	RAL-2000	RAL-2001	RAL-2002	RAL-2010	RAL-3001	RAL-3003	RAL-3005	RAL-3007	RAL-3011
RAL-3012	RAL-3013	RAL-3014	RAL-3015	RAL-3016	RAL-3018	RAL-3027	RAL-4001	RAL-4002	RAL-4005	RAL-4007	RAL-4008
RAL-5000	RAL-5002	RAL-5003	RAL-5004	RAL-5005	RAL-5007	RAL-5008	RAL-5009	RAL-5011	RAL-5012	RAL-5014	RAL-5020
RAL-6000	RAL-6001	RAL-6002	RAL-6003	RAL-6004	RAL-6007	RAL-6008	RAL-6009	RAL-6010	RAL-6011	RAL-6012	RAL-6013
RAL-6014	RAL-6015	RAL-6016	RAL-6017	RAL-6018	RAL-6019	RAL-6020	RAL-6021	RAL-6022	RAL-6025	RAL-6026	RAL-6029
RAL-7000	RAL-7001	RAL-7002	RAL-7003	RAL-7004	RAL-7005	RAL-7006	RAL-7008	RAL-7009	RAL-7011	RAL-7012	RAL-7013
RAL-7015	RAL-7016	RAL-7022	RAL-7023	RAL-7024	RAL-7026	RAL-7030	RAL-7031	RAL-7035	RAL-7037	RAL-7038	RAL-7039
RAL-8000	RAL-8001	RAL-8002	RAL-8003	RAL-8004	RAL-8007	RAL-8011	RAL-8014	RAL-8015	RAL-9001	RAL-9003	RAL-9010


OPTIONAL COLORS




● Material-Low Carbon Steel Q235



● Galvanized Wire

<div style="display: flex; justify-content: space-between; align-items: center;">  <div> <h3>邢台钢铁股份有限公司</h3> <p>XINGTAI IRON AND STEEL CO., LTD</p> <p>产品质量证明书</p> </div> <div> <p>地址: 河北省邢台市钢铁南路262号 ADD: 262Gangtie Road, Xintai, Hebei, China 电话: (86)0319-2042815</p> </div> </div>														
INSPECTION CERTIFICATE														
邢钢质字(B)-013														
订货单位 CUSTOMER					证书号: CERTIFICATE NO	05011010				车号 TRAIN NO	冀E18807-6675			
收货单位 PURCHASER					开证日期 DATE OF ISSUE	2009-10-28				重量合计(t) TOTAL WEIGHT	59.55			
合同号: CONTRACT NO	XG-XS-05				交货标准: SPECIFICATION	Q/XG01-2003				盘数合计(件) TOTAL QTY	40.00			
批号 HEAT NO	产品名称 PRODUCT	盘数 QTY	重量 WEIGHT (t)	化学成份 CHEMICAL COMPOSITION (%)								显微检验 M.E.T		
				C	Mn	Si	S	P			脱碳层 DEC(mm)	夹杂 INCLUSION	晶粒度 G.S	
10502126	高速线材LS φ6.5mm	18	27.00	0.07	0.32	0.30	0.043	0.045			—	—	—	
10502131	高速线材LS φ6.5mm	10	15.00	0.12	0.33	0.30	0.048	0.045			—	—	—	
10502145	高速线材LS φ6.5mm	12	17.55	0.16	0.36	0.30	0.045	0.045						
批号 HEAT NO	拉伸试验 TENSILE TEST				冷弯试验 C.B.T	顶锻试验 C.H.T	硬度 HARDNESS TEST			冲击试验 IMPACT TEST (J)	低倍检验 MACROETCHING TEST			
	屈服强度 ReL Y.S(MPa)	抗拉强度 Rm T.S(MPa)	伸长率 A E.L(%)	断面率 Z R.A(%)							疏松 POROSITY	偏析 SEGREGATION		
10502126	195	355	33.0	—	d=0合格	—	—	—	—	—	—	—		
10502131	215	355	32.0	—	d=0合格	—	—	—	—	—	—	—		
10502145	235	455	23.0	—	d=0合格	—	—	—	—	—	—	—		
备注 REMARK	<p>1、质量证明书复印件不具有同等法律效应 THE COPY OF THE INSPECTION CERTIFICATE IS INEFFECTIVE LEGALLY.</p> <p>2、热轧交货 DELIVERY AFTER HOT ROLLING</p> <p>3、DEC=DECARBURIZATION C.H.T=COLD HEADING TEST G.S=GRAIN SIZE Y.S=YIELD STRENGTH T.S=TENSILE STRENGTH</p> <p>E.L=ELONGATION R.A=REDUCTION OF AREA C.B.T=COLD BEND TEST C.H.T=COLD HEADING TEST M.E.T=MICROSCOPIC EXAMINATIO TEST</p> <p>4、</p>													



技术检验印章
SEAL
签字人: 周晓峰
VIAL
签发人:
SIGNED BY

● Material Document


PRODUCTION LINE



● Raw Material



● Wire Straightening



● Welding



● Electrostatic Coating

PRODUCT TEST



PACKAGE & DELIVERY




● Fence Panel Package



● Fence Post Package



● Fence Loading & Delivery

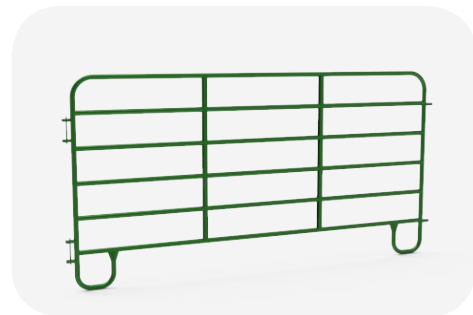

ADD: No.6, HuaFuXiJie, Western Industrial Zone, RaoYang County, Hengshui City, Hebei Province, China.

TEL: +86-15324294271 (WhatsApp)

FAX: +86-318-7207722

SKYPE: apwellwiremesh