


## Temporary Fencing for Australia & New Zealand

Strongest & Most flexible temporary fencing with fence panels, fence feet and associated accessories are ideal solution to perimeter security, including construction sites, private sites and demolition sites.

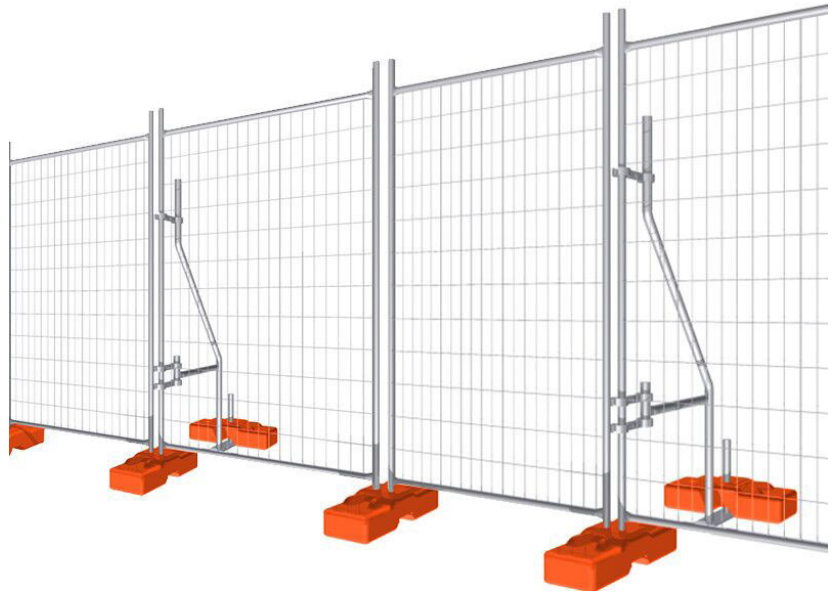

### FEATURES & BENEFITS

#### Full Welding & Hand Welding

Skilled worker 360° hand welding for optimum strength & stability.



#### Comply with Australia Standards

According to AS 4687-2007 Temporary Fencing and Hoarding standard for Australian markets.

**Australian  
Certified**



Tested & Certified to  
Australian Standard  
AS4687-2007  
Temporary Fencing &  
Hoardings



#### Withstand Harshest Environments

Pre-galvanised or hot dipped galvanised finish for most durability even in harshest environments.



#### Lightweight Plastic Feet

Independent production of plastic feet with concrete inserted for easy installation and storing.



#### Large Stocks for Emergent Order

Clean and tidy warehouse for standard specification fences for customers' order.




#### 5 Years Plastic Feet Guarantee

3 to 5 types of anti-ultraviolet Agents added for excellent UV resistance and anti-aging performance.



## TECHNICAL DETAILS

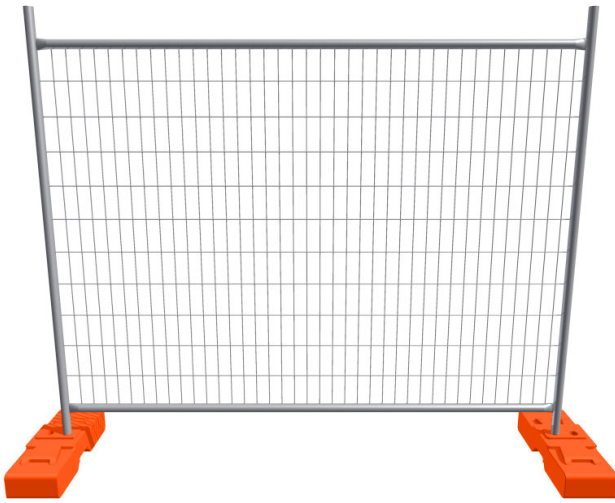

### Econo Fence Panel

**Panel Size:** 2400 mm (L) × 2100 mm (H).

**Frame Size:** 32 mm O.D. × 1.5 mm thickness.

**Zinc Coating:** 42 microns.


**Infill Mesh:** 3 mm horizontal, 3 mm vertical.

**Aperture Spacing:** 150 mm × 60 mm spacing.

**Surface Treatment:**

Pre-galvanized 42 microns.

Hot-dipped galvanized 90 microns.

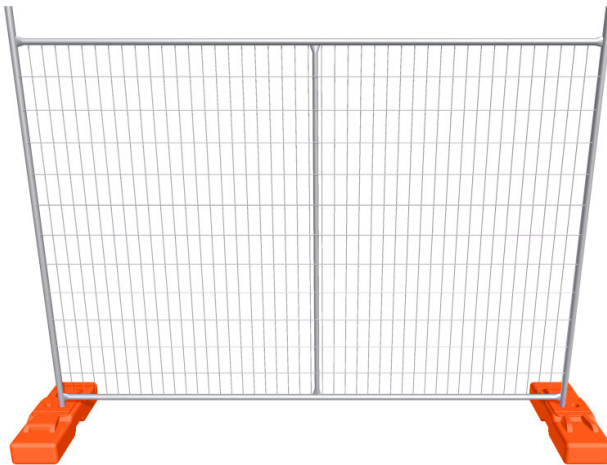

### Heavy Duty Panel

**Panel Size:** 2650 mm (L) × 2100 mm (H).

**Frame Size:** 32 mm O.D. × 2.0 mm thickness.

**Infill Mesh:** 4 mm horizontal, 4 mm vertical.


**Aperture Spacing:** 150 mm × 60 mm spacing.

**Zinc Coating:** 42 microns.

**Surface Treatment:**

Pre-galvanized 42 microns.

Hot-dipped galvanized 90 microns.

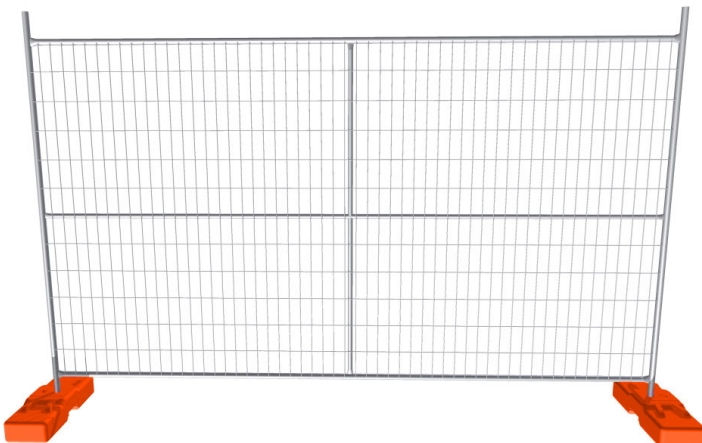

### Custom Panel specification I – Extra large

**Panel Size:** 3300 mm (L) × 2100 mm (H).

**Frame Size:** 32 mm O.D. × 2.0 mm thickness.

**Infill Mesh:** 4 mm horizontal, 4 mm vertical.

**Aperture Spacing:** 150 mm × 60 mm spacing.


**Surface Treatment:**

Pre-galvanized 42 microns.

Hot-dipped galvanized 90 microns.



## TECHNICAL DETAILS

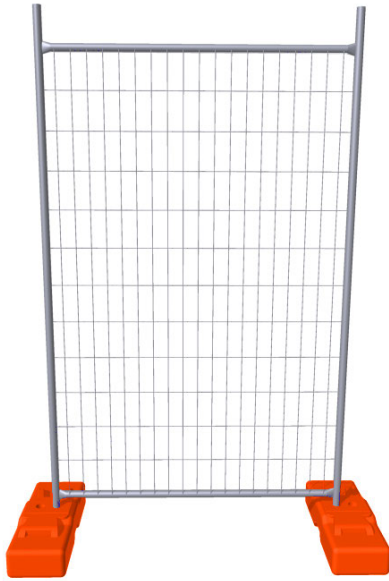

### Custom panels specification II – Half Panels

**Panel Size:** 1200 mm (L) × 2100 mm (H).

**Frame Size:** 32 mm O.D. × 1.5 mm thickness.

**Infill Mesh:** 3 mm horizontal, 3 mm vertical.

**Aperture Spacing:** 150 mm × 60 mm spacing.

#### Surface Treatment:

Pre-galvanized 42 microns.

Hot-dipped galvanized 90 microns.

#### Suitable applications:

Gate or next to gates or where a smaller panel is more suitable to your needs

## ASSOCIATED ACCESSORIES



Plastic feet



Clamps




Shade cloth



Razor wire & Barbed wire



Handrails

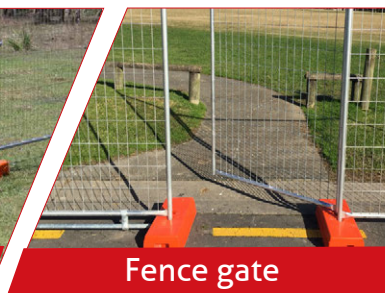

Fence gate



Dog bars



Bracing

