

Swing & Sliding Temp Fence Gate – Pedestrian & Vehicles

To provide a access way into or out of the restrictive areas. We provide almost all kinds of fencing gates to match with your temporary fencing neither CA temporary fence, AU & NZ temporary welded fence, temporary chain link fence or crowd control barriers. There are following styles and sizes for different applications.



FEATURES & BENEFITS

Defined Opening Area

Fence gates provide pre-designed entranceway for the contained areas. The opening size can be customized as request.

Multi-Function

Single swing leaf gates for pedestrian and double swing leaf gates for vehicles. And sliding gate for minimum space occupation for actual needs.


Superior Corrosion Resistance

All the gate panels are treated with hot dipped galvanized or colorful powder coating. The service life can be more than 25 years.

Easy Installation

All fence gates are easily removed and mobile installed when necessary. This can be completed by just single worker.

TECHNICAL DETAILS

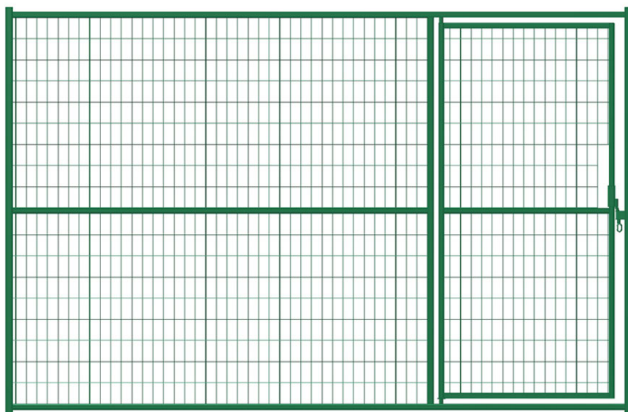

CA temporary fence gate

Gate width: 2.0', 2.5', 2.9' optional.

Gate height: 3.4', 4', 4.9', 5', 5.6', 6.6', 6.9' optional.

Wire diameter: 0.16", 0.24" optional.

Mesh opening: 2" × 4", 2.36" × 6", 2.95" × 6" optional.

Frame O.D.: 1.18" × 1.18" × 0.08", 1.58" × 1.58" × 0.08 optional.

Frame TH : 0.08"—1".

Middle horizontal pipe O.D.: 1" × 1" × 0.08".

Gate construction: 360° full welded tubular frame.

Surface treatment:

Electric galvanized before powder coated.
Hot dipped galvanized after welding.

TECHNICAL DETAILS

AU & NZ Temporary Fence Gate

Material: Steel pipe, steel wire.

Pedestrian Gate Dimensions (H × W)

Gate width: 3.28'–4.27'.

Gate height: 6.9'.

Vehicle Gate Dimensions (H × W): 6.9' × 4.9'.


Wire diameter: 0.16", 0.24" optional.

Mesh opening: 2" × 4", 2.36" × 6", 2.95" × 6" optional.

Frame O.D.: 1.18" × 1.18" × 0.08", 1.58" × 1.58" × 0.08" optional.

Frame TH: 0.08"–1".

Middle horizontal pipe O.D.: 1" × 1" × 0.08".

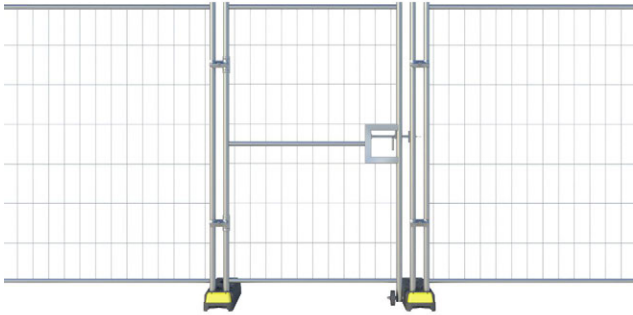

Chain link fence gate

Material: Steel pipe, chain link mesh.

Wire diameter: 9 ga., 10.5 ga., 11 ga., 11.5 ga., 12 ga. optional.


Mesh opening: 2", 2.25", 2.375", 2.4", 2.75" optional.

Frame O.D.: 1.25", 1.315", 1.5", 1.6", 1.66" optional.

Frame wall thickness: 0.06".

Gate post (O.D. × H): 2.36" × 2.36" × 0.06".

Post height: 9.2'.

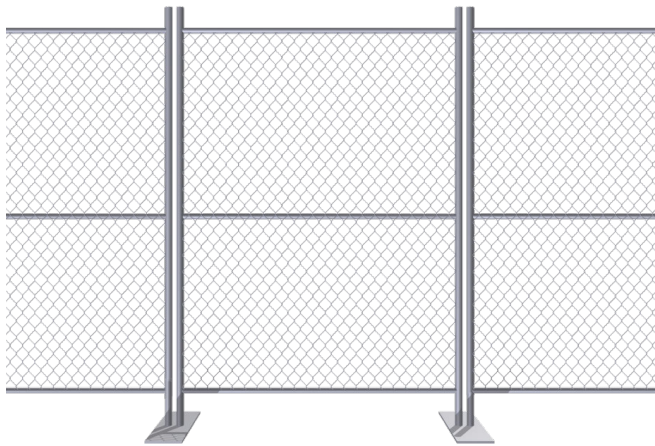


Double swing leaf gate dimensions

Common dimensions (H × W)	3.5' × 12'	4' × 10'	4' × 12'	5' × 10'	6' × 10'	6' × 12'
Actual dimensions (H × W)	3.5' × 11.5'	4' × 9.5'	4' × 11.5'	5' × 9.5'	5.79' × 9.58'	6' × 11.5'
Fits Min. Opening	12"	10"	12"	10"	10"	12"
Fits Max. Opening	144"	120"	144"	120"	120"	144"

Single swing leaf gate dimensions

Common dimensions (H × W)	4' × 4'	5' × 3.5'	5' × 4'	5' × 6'	6' × 4'	6' × 6'
Actual dimensions (H × W)	4' × 3.66'	5' × 3.16'	5' × 3.66'	5' × 6'	6' × 3.66'	6' × 6'
Fits Min. Opening	4"	3.5"	4"	24"	4"	24"
Fits Max. Opening	48"	42"	48"	72"	48"	72"

TECHNICAL DETAILS

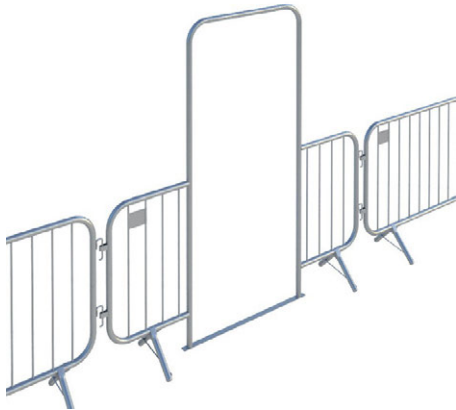

Crowd control barrier gate

Material: Steel pipe.

Gate height: 45", 48".

Arch height: 10'.

Frame: 14 gauge.

Upright pipe: 5/8" OD x 16 gauge thickness.

Upright spacing: 4".

Type : Feet: Flat or fixed.


AVAILABLE STYLES



Barricade gate



Gate & arch

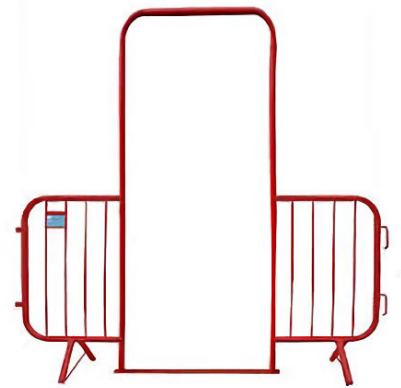

Walkthrough barricade Gate

Gate & arch dimensions

Gate length	4'	6'	8'	10'	12'
Arch width	4' 7"	6' 7"	8' 7"	10' 7"	12' 7"

AVAILABLE FEET STYLES

